


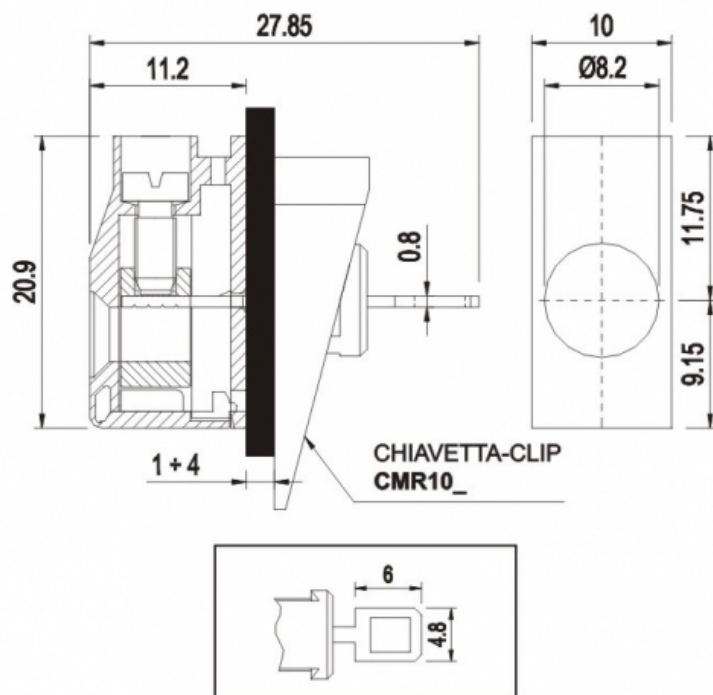

Panel feed-through terminal block - Fixed by clip - Modular version - Standard terminal - Pitch 10mm - 1 pole

GENERAL INFORMATION

pitch:	10 mm
housing height:	20,90 mm
housing depth:	11.2 mm
dimensional class:	high
wire section:	4.0 mm ² / 12 AWG
clamp opening size:	ø8.2 mm
wire stripping:	max 10 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	32A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	32A
voltage:	450V
wire section:	4.0mm ²
torque:	0.5Nm
FILE:	CA02.00601



EN 60998-1

current:	32A
voltage:	450V
wire section:	4.0mm ²
torque:	0.5Nm
FILE:	40014733



UL 1059

current:	36A factory / 30A field
voltage:	600V
wire section:	10÷30AWG
torque:	4.5Lb-in
FILE:	E178356

ADDITIONAL INFORMATION

MATERIALS	
housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickeled copper alloy
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS

GN^(STD)

GY

BK

BL

RD

YL

OG

YG

other colours:upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MPT410	N/A	N/A	N/A