




RT702 RT702-B



RT702-B AMB AMA

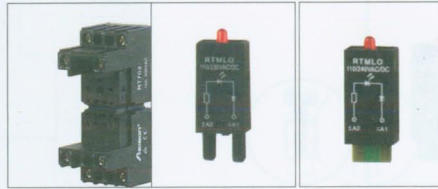



Specification

Rated load	Current / Voltage	AVAC	10/300
Dielectric strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2500
External connection wire	AWG/mm ²	20-14/0.5-2.5	
Screw torque	Nm	0.8	
Terminal protection degree		IP20	


Matched relay

Socket model	Relay model	Metal Clip	Module	DIN clip
RT702	MY2	B-35 K-35	AMA Series	
	MY2K			
RT702-B	57.02	JQX-13F 2Z	AMB Series	
	JQX-13F 2Z			



Outline dimension, Wiring diagram

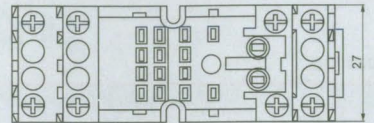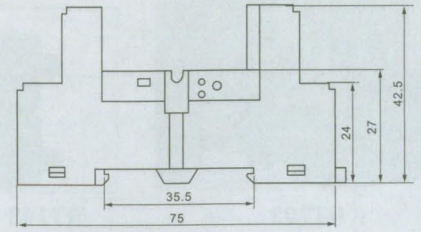


RT702-B

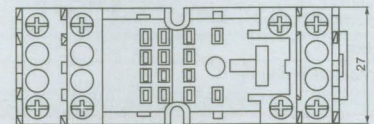


RT702



RT704-B



RT704-B AMB



Specification

Rated load	Current / Voltage	AVAC	10/300
Dielectric strength	Coil/Contact	V/S	4000
	Between contacts	V/S	2500
External connection wire	AWG/mm ²	20-14/0.5-2.5	
Screw torque	Nm	0.8	
Terminal protection degree		IP20	

Matched relay

Socket model	Relay model	Metal Clip	Module	DIN clip
RT704-B	MY4	B-35 K-35	AMB Series	
	MY4K			
	57.04			
	JQX-13F 4Z 3A			

Outline dimension, Wiring diagram

