



Straight Type

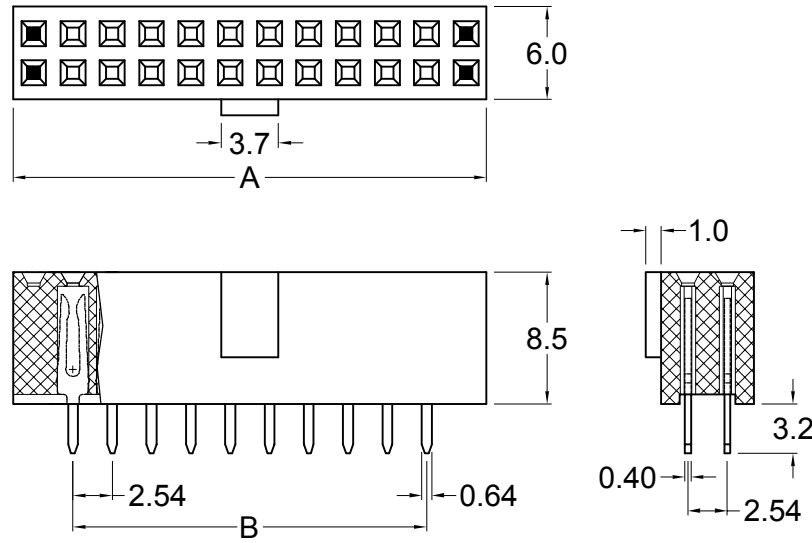

Right Angle Type

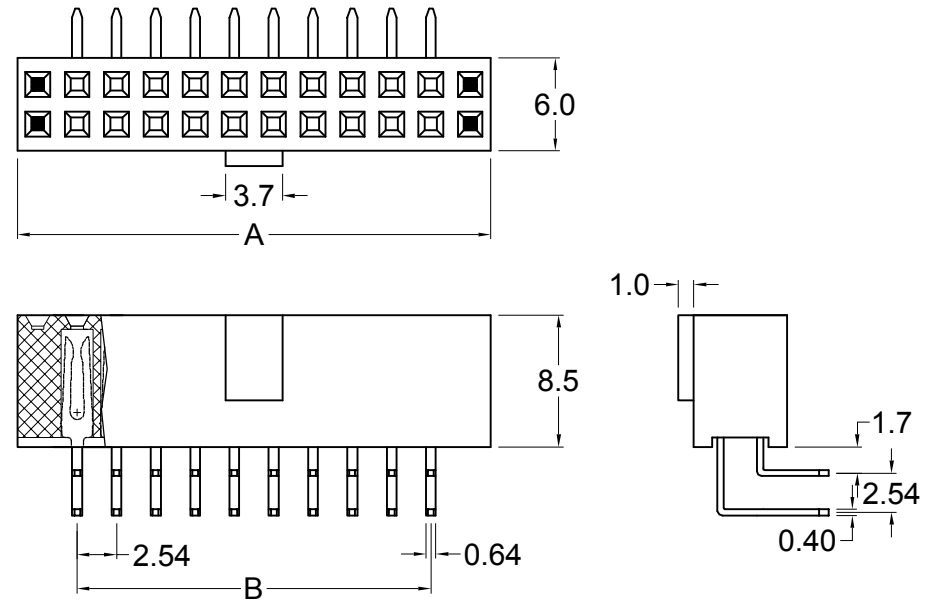

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black
 接触件 Contacts: Brass
 电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
 工作电流 Current Rating: 2 AMP
 使用温度范围 Operating Temperature: -55℃~+105℃

Dimension

Position	10	16	20	26	34	40
A ± 0.20	17.90	25.52	30.60	38.22	48.38	56.00
B ± 0.15	10.16	17.78	22.86	30.48	40.64	48.26

TITLE		P.C.B SOCKET 2.54 帶定位型母座		GENERAL TOLERANCE		DRAWN BY		DATE			
SERIES				x. : ±0.3 x.x: ±0.2 x.xx: ±0.1		w.j.huang		09.04.10			
CUSTOMER P/N				ANGLE TOLERANCE		CHECKED BY		DATE			
UNITS		mm		x. : ±2° x.x: ±1° x.xx: ±0.5°		APPROVED BY		DATE		DRAWING NO.	
SCALE	DESCRIPTION	CHK	DATE	SCALE	2:1	PROJECTION				SHEET 1 OF 1	
										SHEET SIZE A4	
										REV. A0	