


**ROHS COMPLIANT**

**SPECIFICATION**




Current Rating: 3.0Amp  
 Insulation Resistance: 1000MΩ min  
 Contact Resistance: 20MΩ max  
 Withstand Voltage: 500V AC/DC  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PBT/PA6T+30%GF UL 94V-0

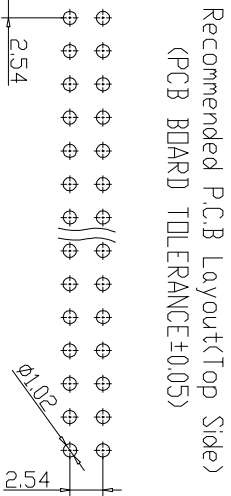

Ordering Code: HY1017-01 - X - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥

① Series No:  
 ② No. of Contacts  
 06 08 10 12 14 16 18  
 20 22 24 26 28 30 32  
 34 36 40 44 48 50 60  
 64  
 ④ Color Insulator  
 B:Black  
 U:Blue  
 G:Gray

③ Contact Plating  
 G0: Gold flash  
 G1: 3u" Gold  
 G2: 5u" Gold  
 G3: 10u" Gold  
 G4: 15u" Gold  
 G5: 30u" Gold  
 ⑤ Insulator Material  
 A: PBT  
 B: PA6T  
 ⑥ Packing  
 A: Tray  
 T: Tube

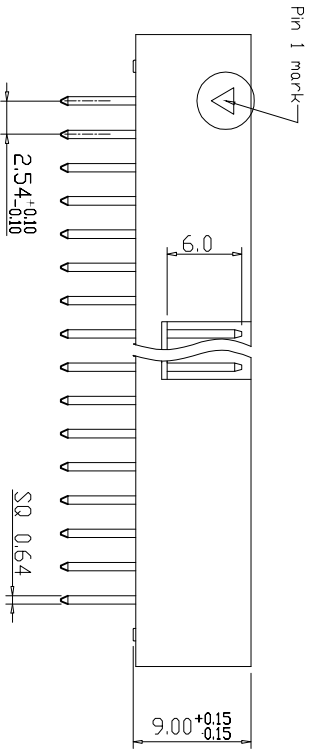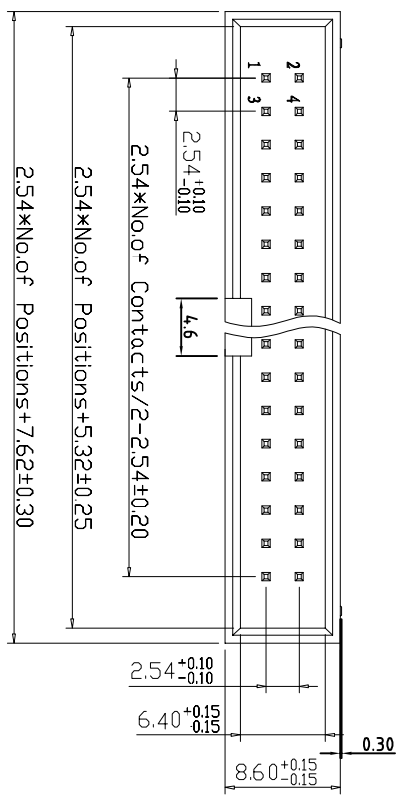

Unless Otherwise specified tolerance  
 X.±0.35  
 X.X±0.25  
 X.XX±0.20  
 X.XXX±0.15  
 SCALE: 2:1  
 UNIT: mm

慈溪万海电子有限公司  
 CIXI WANHAİ ELECTRONICS CO., LTD.

TITLE: 2.54mm Box Header 180° H=9.0

DRAWN: \_\_\_\_\_  
 CHECKED: YANG  
 DRAWING NO: HY1017-01  
 PRODUCT NO: HY1017-01

REV	DESCRIPTION	DATE
1	Add option of plating	10-08-28