

SPECIFICATION

MATERIAL:

Housing: PBT+30%G. F UL94V-0

Contacts: Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC/minute

Operating temperature: -55° C TO +125° C

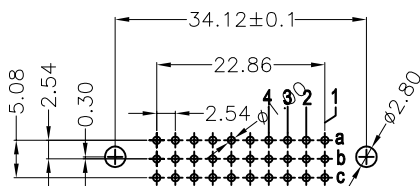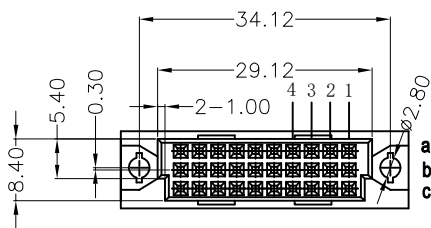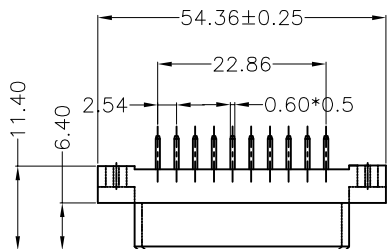

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

公差	Length	1	2	W1	W2
±0.25	L	4.0	2.5	13	17
Pitch	Position	Rows with Contacts	Contact Arrange		
2.54	30	A B C			
	20	A - C			
	10	A - -			
5.08	15	A B C			
	10	A - C			
	5	A - -			

9001- 1 6 30 1 C 00 A
 Series 1:2.54mm 6:Female Position 1:Dip Length C:Selective 00:G/F A:Tray
 2:5.08mm Gold Plated Package
 W1:Dip Length
 W2:Dip Length

公差一览表				TOLERANCE UNLESS OTHERWISE								
X.	±0.25	X'.	±5'	单位	mm	制图	OD	产品名称	欧式插座	DIN41612	330直孔	180度母座
.X	±0.20	.X'	±2'	角法		设计	FGD					
.XX	±0.15	.XX'	±1'	VIEW		审核	FGD	产品料号	9001-16301C00A	图号	9001-16301C00A-A0	
.XXX	±0.02	.XXX'	±0.5'	比例	1:1	核准	ZY					
日期	2009.04.15			版本	A0	核准	APPD	DRAW NO				