
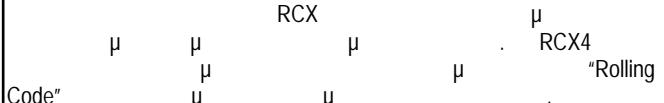



**RCX4****Τηλεχειριστήριο RF****REMOTE CONTROL  
RADIO TRANSMITTER**

RCX series of RF remote control is based on a system for sending a coded signal from a transmitter to a receiver. The RCX4 remote control uses "Rolling Code" transmission technique which makes the radio control device extremely safe.

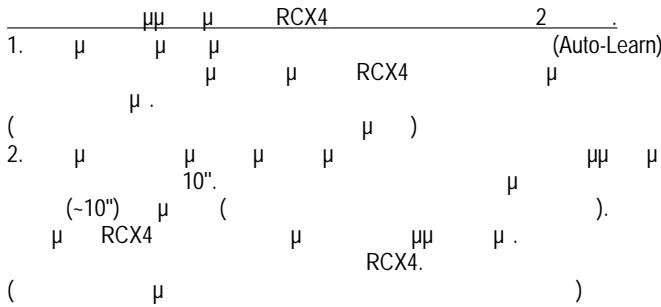

There are 2 ways to store a RCX4 remote control on a door control panel.

1. First press the Auto-Learn button on the control board and then press the button of the RCX4 you want to store.  
(Needs access to the door motor control board)
2. Press and hold for about 10" an already stored remote control. The door starts moving but after a while (~10") it stops (without having reached the limit switches). Then you press the button of the RCX4 you want to program. The door motor control board stores the code of the new RCX4  
(You will need to be close to the door and the door motor control board)

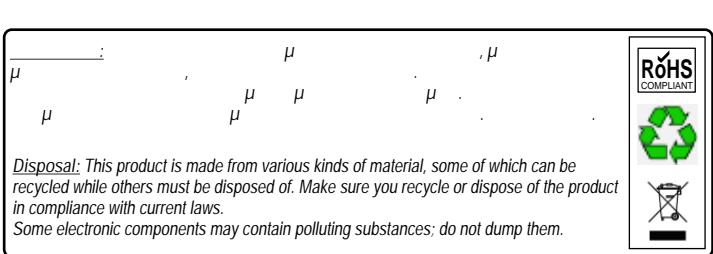**Technical specifications /**

Carrier frequency /	: 433.92MHz
Coding /	: 64bit digital rolling code
Radiated power /	μ : 1mW
Input power /	: 12Vdc - LR23A Battery
Average absorption /	: 25mA
Working temperature /	μ : -40°C +85°C

**DECLARATION OF CONFORMITY**

AUTOTECH - G .KAPSALIS  
8, Archimidiou str. 12134 Peristeri Athens,  
Greece, Tel: +302105780019, Fax: +302105785112  
*In accordance with the following directives:*

- ETSI-EN 301 491-1, -3
- EN 300 220-3
- EN 55022
- EN 61000-4-3, -4-2
- EN 50371

CE


hereby declare that:  
Product : Remote Control Transmitter RCX  
Model : RCX 4

*is in conformity with the applicable requirements of the following documents.*


I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all the applicable essential requirements of the directives mentioned.



Name: Apergis Antonios  
Position: Technical Director  
Peristeri, 28 November 2013

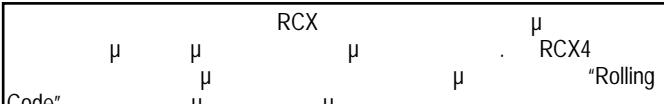
**RCX4****Τηλεχειριστήριο RF****REMOTE CONTROL  
RADIO TRANSMITTER**

RCX series of RF remote control is based on a system for sending a coded signal from a transmitter to a receiver. The RCX4 remote control uses "Rolling Code" transmission technique which makes the radio control device extremely safe.

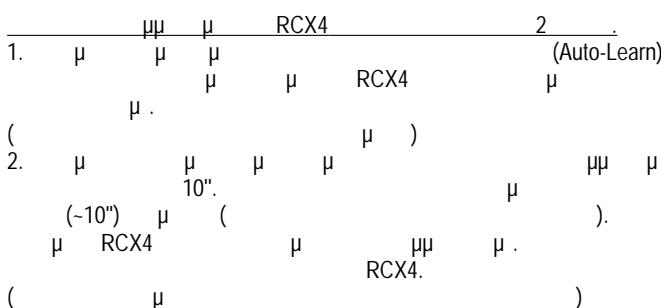

There are 2 ways to store a RCX4 remote control on a door control panel.

1. First press the Auto-Learn button on the control board and then press the button of the RCX4 you want to store.  
(Needs access to the door motor control board)
2. Press and hold for about 10" an already stored remote control. The door starts moving but after a while (~10") it stops (without having reached the limit switches). Then you press the button of the RCX4 you want to program. The door motor control board stores the code of the new RCX4  
(You will need to be close to the door and the door motor control board)

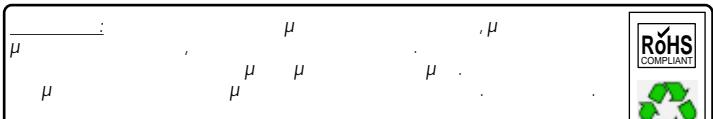**Technical specifications /**

Carrier frequency /	: 433.92MHz
Coding /	: 64bit digital rolling code
Radiated power /	μ : 1mW
Input power /	: 12Vdc - LR23A Battery
Average absorption /	: 25mA
Working temperature /	μ : -40°C +85°C

**DECLARATION OF CONFORMITY**

AUTOTECH - G .KAPSALIS  
8, Archimidiou str. 12134 Peristeri Athens,  
Greece, Tel: +302105780019, Fax: +302105785112  
*In accordance with the following directives:*

- ETSI-EN 301 491-1, -3
- EN 300 220-3
- EN 55022
- EN 61000-4-3, -4-2
- EN 50371

CE

hereby declare that:  
Product : Remote Control Transmitter RCX  
Model : RCX 4

*is in conformity with the applicable requirements of the following documents.*

I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all the applicable essential requirements of the directives mentioned.



Name: Apergis Antonios  
Position: Technical Director  
Peristeri, 28 November 2013